
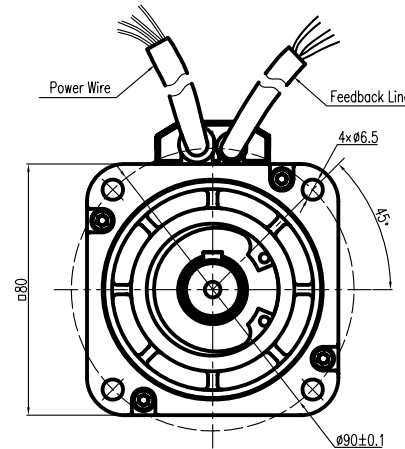



Demension

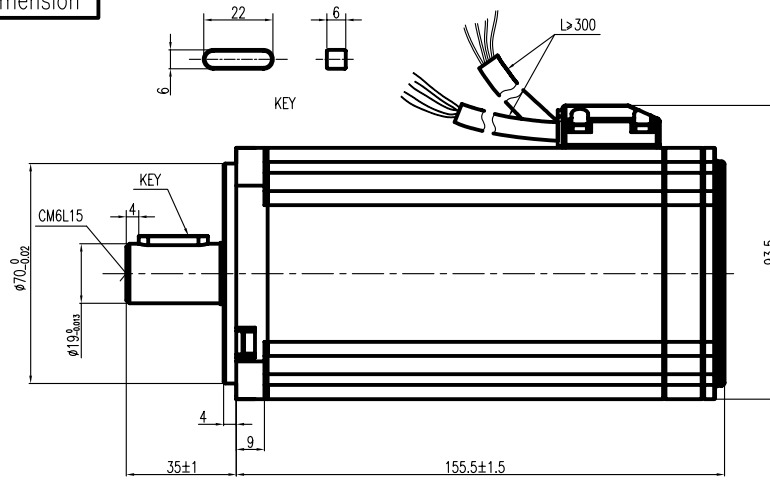

Technical Data

Motor Technical Data		
No. of poles	8	
Voltage U_{bc} (V)	48	
Rated Power P_N (W)	840	
Rated Torque T_N (N.m)	2.67	
Rated Speed n_n (rpm)	3000	
Rated Current I_N (A)	23	
Resistance line-line R_L (Ω)	0.07	
Inductance line-line L_L (mH)	0.37	
Voltage constant K_e (V/krpm)	8	
Torque constant K_t (Nm/A)	0.098	
Rotor moment of inertia J_m (Kg.cm ²)	1.9	
Insulation class	F	
Max. radial force F_r (N)	335	
Max. axial force F_a (N)	167.5	
Weight (Kg)	4.2Kg	
Feed back device	HALL Sensor (switch)	
Cooling method	Totally enclosed non-ventilated	
protection level	IP54	
Environmental conditions	Temperature	-20℃~40℃
	Humidity	Below 90%RH (No dewing)
	Environment	Far away active gas, combustible gas, oil drop, ash.
	Installation altitude	UP TO 1000m: rated power, above 1000m: 1.5% power decreasing per 100m, max. 4000m

Motor to Hall Relationship

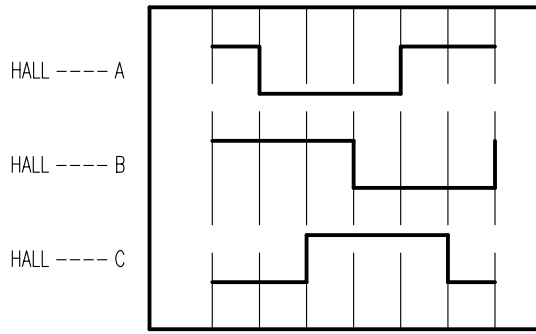


Line Define

Power Wire

Yellow(12AWG)	Motor U
Red(12AWG)	Motor V
Black(12AWG)	Motor W
YEL/GRN(16AWG)	PE

Feedback Wire

Red(24AWG)	Vcc +5V
Blue(24AWG)	GND
Gray(28AWG)	Hall A
Green(28AWG)	Hall B
White(28AWG)	Hall C

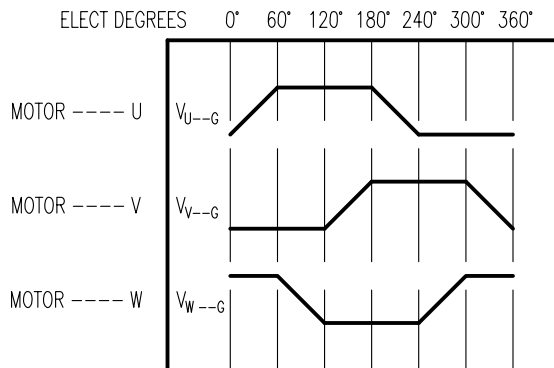

PHASE TO GROUND VOLTAGE
ROTATION CW FROM THE FLANGE

DESIGN	DATE	P/N.	K3.162.5068SS
REV	ECN NO.	DESCRIPTION	TITLE
			外形图
UNLESS OTHERWISE SPECIFIED TOLERANCES		MATERIAL	CONTR.
DECIMALS:	ANGULAR:		
.x ±0.5	±0°30'		
.xx ±0.25			
.xxx ±0.1			
UNIT: mm			
DO NOT SCALE DRAWING			
FIRST ANGLE PROJECTION	SCALE	USED ON	K80BL80-48V-30-840-2
	SHEET	DWG NO.	REV A
	OF		KINAVO MOTOR